

VÁLVULAS DE RETENCIÓN / CHECK VALVES

VÁLVULA DE RETENCIÓN A PISTÓN FORJADA A. CARBONO A-105 ANSI 800lbs NPT - SW FORGED PISTON CHECK VALVE CARBON STEEL A-105 ANSI 800lbs NPT - SW



TECFLW®

TF-PCV800-T



UTILIZACIÓN / APPLICATION :

Gas oil, vapor, petroquímica, petróleo, alta presión
Nafta, steam, petrochemical, petroleum, high pressure.

CARACTERÍSTICAS GENERALES / GENERAL CHARACTERISTICS :

Medidas / Range: 3/8" - 2".

Tipo Pistón con muelle / Piston type with spring

Tapa atornillada / Bolted bonnet.

Cierre metal-metal / Metal-metal seat TRIM 8

Posición Horizontal respetar la Flecha indicadora / Respect the arrow flow direction indicator, horizontal pos. Only

Paso estándar / Standar Port

Clase 800# / class 800 lbs.

NORMATIVAS / STANDARDS :

Fabricación / Manufacture according to ISO 9001 : 2008

Directiva CE / Directive 2014/68/EU: CE Nº 0036 Risk Category III module H

Pruebas de presión / Pressure Tests according to API 598 Table 6

Rosca NPT / NPT according to ANSI B1.20.1

Rosca BSP cónica / BSP conical ends according to ISO 7-1 Rc

Soldar SW / Socket welding ends according to ISO 15761

Diseño / desinning according to ISO 15761 and API 602 8th

ATEX / ATEX Group II Category 2G/2D zone 1&21 zone 2&22 according to directive 2014/34/EU

Marcaje ATEX opcional / Optional ATEX marking.



CONDICIONES DE SERVICIO / WORKING CONDITIONS :

Máxima presión de trabajo / Maximum Working Pressure : 136 bar.

Temperatura máxima de trabajo / Maximum Working Temperature : -29 °C / +425 °C.

MATERIALES / CONSTRUCTION :

No.	Pieza Part	Material Material
1	Cuerpo Body	ASTM A105
2	Bonete Bonnet	ASTM A105
3	Pistón Piston	ASTM A276 type 410
4	Asiento Seat	ASTM A276 type 410+Stellite Gr.6
5	Junta Gasket	SS316+ Graphite
6	Guía Guide	ASTM A276 type 410
7	Tornillos Bolts	ASTM A 193 Gr.B7
8	Rivet Rivet	Acero carbono Carbon Steel
9	Placa aluminio Name plate	Aluminio Aluminium
10	Muelle Spring	AISI-302

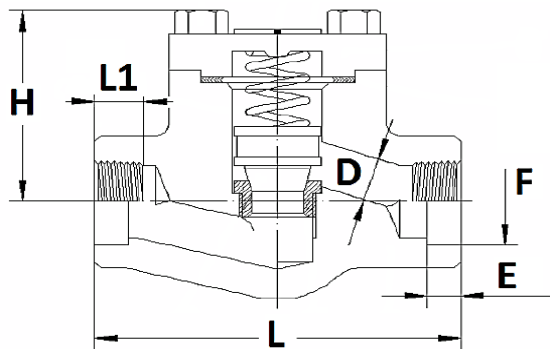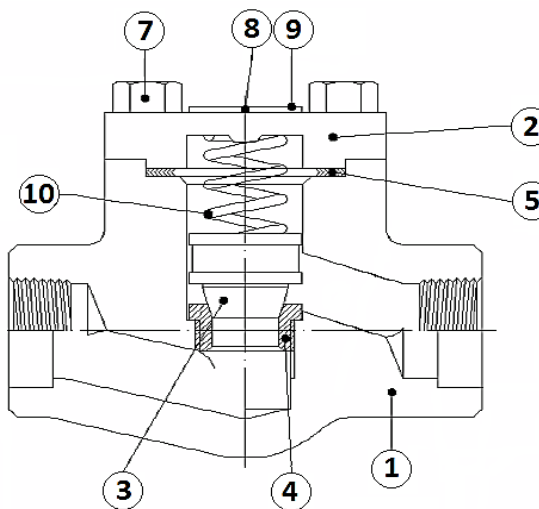

DIMENSIONES / DIMENSIONS :

DN ND	ØD	L	H	L1	E (SW)	ØF (SW)	Kvs m3/h	Peso Weight
3/8"	7	80	53	13	11,1	17,6	0,95	1,30
1/2"	9	80	53	15	12,7	21,8	0,86	1,20
3/4"	13	90	60	18	14,5	27,2	2,4	1,40
1"	17,5	110	73	19	16	33,9	5,2	2,40
1 1/4"	22,5	127	80	20	17,5	42,7	8,2	3,60
1 1/2"	29,5	155	98	21	19	48,8	9,5	5,40
2"	35	170	118	21	22	61,2	15,6	8,00