

VÁLVULAS DE GLOBO / GLOBE VALVES

VÁLVULA DE GLOBO PN40 ACERO CARBONO BRIDAS PN-40 GLOBE VALVE NP40 CARBON STEEL FLANGED NP-40

TECFLW®

TF-GLV-CS-F40



UTILIZACIÓN / APPLICATION :

Aplicaciones en Agua, fluidos comunes, instalaciones de climatización, vapor.
Water and common fluids applications, HVAC, Steam.

CARACTERÍSTICAS GENERALES / GENERAL CHARACTERISTICS :

Medidas / Size: DN-15 to DN-200.

Husillo rotatorio ascendente / Rotating rising stem and handwheel.

Bonete atornillado / Bolted bonnet.

Obturador Cónico / Conical disc.

Cierre metal-metal inox / Stainless steel metal-metal seat.

Flecha indicadora dirección fluido / Respect the flow direction (indicated by the arrow)

Pintura / Painting Blue RAL 5002 15µm

NORMATIVAS / STANDARDS :

Fabricación / Manufacture according to ISO 9001 : 2008.

Diseño / Designing according to DIN 3840.

Marcado / Marking according to EN 19.

Directiva CE / Directive 97/23/CE CE Nº0035 Risk category III Module H

Pruebas / Pressure test according to EN 12266-1 range A

Longitud / Face to face according to EN 558 series 1 (DIN 3202 F1)

Bridas R.F. / Bridas R.F. according to EN 1092-1 PN-40

CONDICIONES DE SERVICIO / WORKING CONDITIONS :

Máxima presión de trabajo / Maximum Working Pressure : 40 bar.


Temperatura máxima de trabajo / Maximum Working Temperature : - 20 °C / + 400 °C.

No usar con aceite térmico / Don't use for thermic fluids



MATERIALES / CONSTRUCTION :

No.	Pieza Part	Material Material
1	Cuerpo Body	A216 WCB (1.0619)
2	Bonete Bonnet	A216 WCB (1.0619)
3	Eje Stem	X12 CrNi S 18 8
4	Disco Disc	AISI 420 (DN15-100) A105+Stellite (DN125-200)
5	Asiento Seat	CA6NM (DN15-100) AISI-304 (DN125-200)
6	Prensa Gland	EN 10025
6.1	Casquillo Gland ring	EN 10087
7	Volante Handwheel	EN GJS-400
10	Junta tapa Bonnet gasket	Grafito Graphite
11	Empaquetadura Packing	Grafito Graphite
12	Tornillo Gland Bolt	Acero 5.6 Steel 5.6
14	Tornillo tapa Bonnet bolt	Acero C35E Steel C35E
16	Tuerca Volante Handwheel nut	Acero 5.6 Steel 5.6
17	Arandela Washer	Acero Steel
19	Lubricador Lubricator	Latón Brass

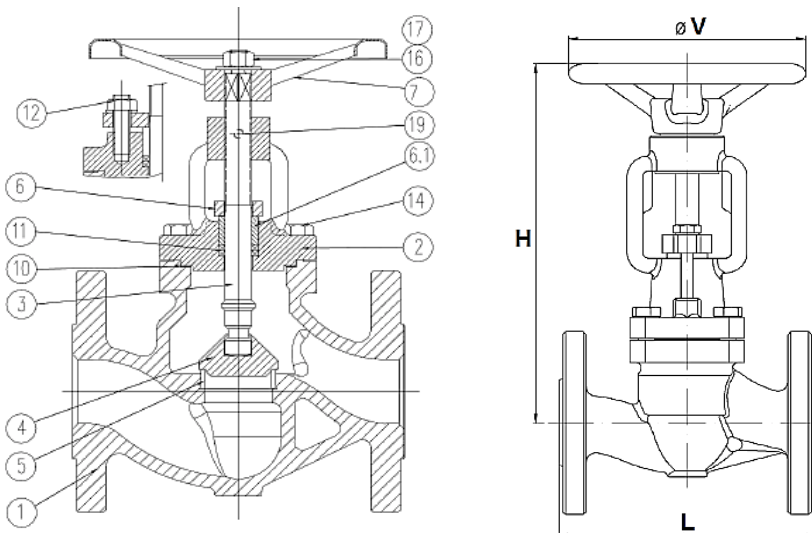

DIMENSIONES / DIMENSIONS :

DN ND	L	H	ØV	Kvs	Peso Weight
15	130	190	140	4	3,50
20	150	195	140	7	4,30
25	160	220	140	11	6,30
32	180	219	140	19	7,30
40	200	254	180	30	12,50
50	230	265	180	46	15,00
65	290	328	200	70	22,50
80	310	341	200	115	27,50
100	350	376	250	150	42,00
125	400	488	330	220	67,00
150	480	531	330	310	99,00
200	600	663	400	675	200,00